



X-RANGE 'X' PLAN WIRING DIAGRAM UNVENTED CYLINDER OPTION

230Vac 3amp
SWITCHED
FUSED SPUR



EARTH
NEUTRAL
LIVE

*External Hot water
timer (Volt free switching)




*Hot water can be timed
via the built-in PCB function

NTC
Cylinder
Sensor




Earth connections to PCB not
shown for reasons of clarity

EARTH
CYL. O/H STAT
MANUAL RESET



WIRING CENTRE





ZONE VALVE
C/HEATING
V4043B
(NORMALLY OPEN)



ZONE VALVE
D H W
V4043H
(NORMALLY CLOSED)



Parameter P001 = option 1
for PDHW
Parameter P081 = option 3
Parameter P070 = adjust to
% of Kw rating for cylinder
coil.

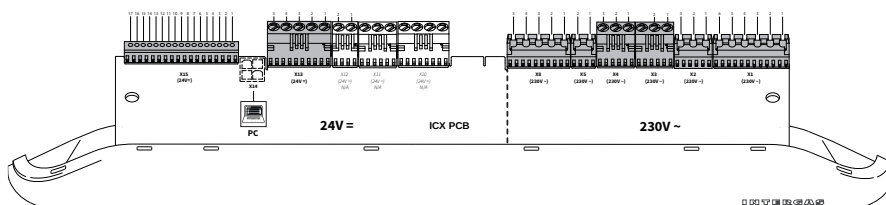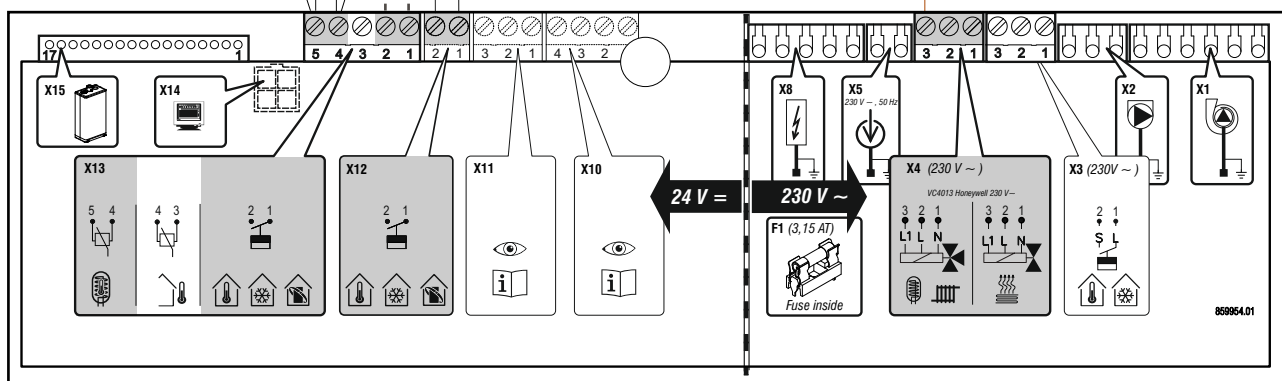

INTERGAS®
BOILERS